


Straightliner Plus


Instructions for Use

PREPARING SURFACE GUIDELINES...



FOR STRAIGHT LINES...

- Mark the CENTER of the lines to be masked with chalk line. (Snap line)

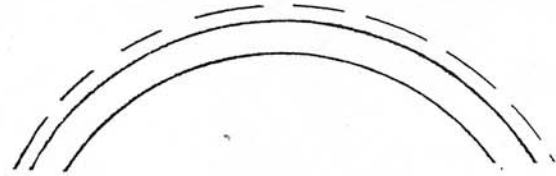


FOR CURVES AND CIRCLES...

- Mark a guide for the StraightLiner Plus with string and chalk. ADD 1-3/4 INCHES TO THE RADIUS OF THE NEEDED CIRCLE/CURVE (3-1/2 inches to it's diameter). This chalk line will be used as a guide for the OUTER WHEELS of the StraightLiner Plus, NOT the center of the lines to be masked.

LOADING THE STRAIGHTLINER- PLUS...


- 1) Determine the width of line to be masked. The StraightLiner Plus will mask lines 1-1/2, 2, 2-1/2, or 3 inches wide.

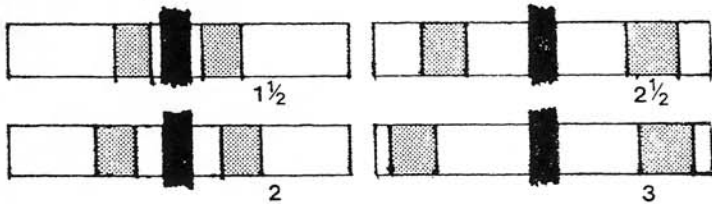

- 2) Loosen the nylon wing-nuts of the tape guides. Adjust the tape guides so that the needed notches face up and forward. Tighten nylon wing-nuts.


- 3) Pull one foot of tape from spool. Load the StraightLiner Plus with two (2) 1" masking tape spools, with adhesive side of tape up.

- 4) Thread the tape as shown around tape guides and rollers.

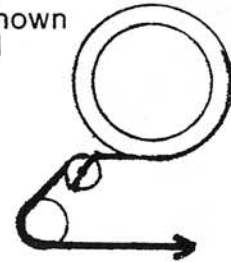


MASKING LINES WITH THE STRAIGHTLINER-PLUS...

FOR STRAIGHT LINES...

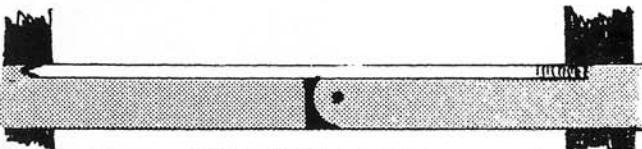

- 1) Position a STRAIGHTEDGE along the side of the frame to make sure that the frame of the STRAIGHTLINER-PLUS IS STRAIGHT.

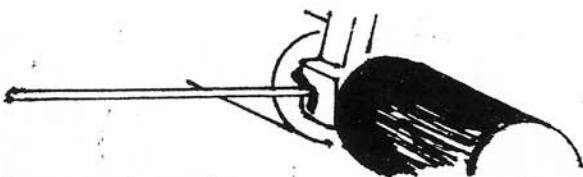


Screw pointer into the front of STRAIGHTLINER-PLUS frame and tighten wing nut.


FOR CURVES AND CIRCLES...



- 1) Loosen the hex set-screw on the top of the StraightLiner frame.

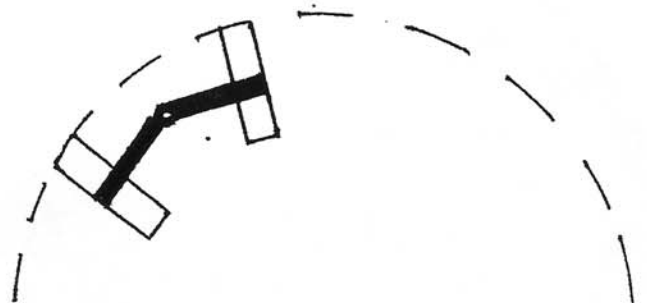

- 2) Adjust the taper of the frame by aligning the OUTER WHEELS of the StraightLiner-Plus with the INSIDE of the chalk-line.

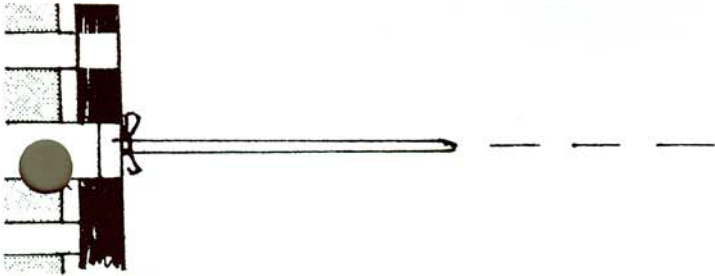


3) With the masking tape under at least the two front wheels (rollers), position the STRAIGHTLINER-PLUS so that the pointer is pointing for the center chalk line.




4) To allow a good start, begin laying masking lines roughly 2 feet from the end of the line to be masked.

3) Tighten the set screw and make a 'dry-run' without tape to make sure that the wheels track the chalkline. The pointer is not used for circles and curves.

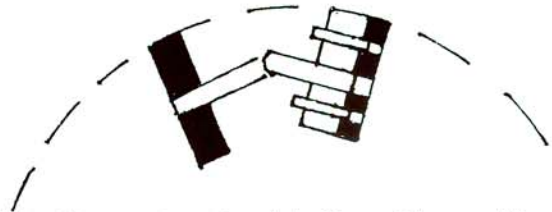


4) Position the StraightLiner-Plus with the outer wheels INSIDE the chalkline, and the masking tape under at least the front wheels.

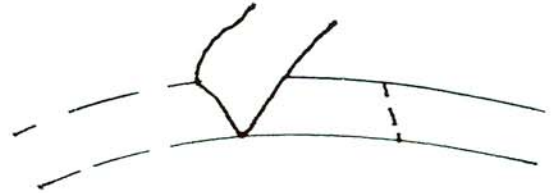

5) Lay masking lines, BUT BEFORE ENDING A CIRCLE, lift and trim off roughly two feet of the beginning of the masking tape and continue to make the complete circle.

FINAL NOTES...

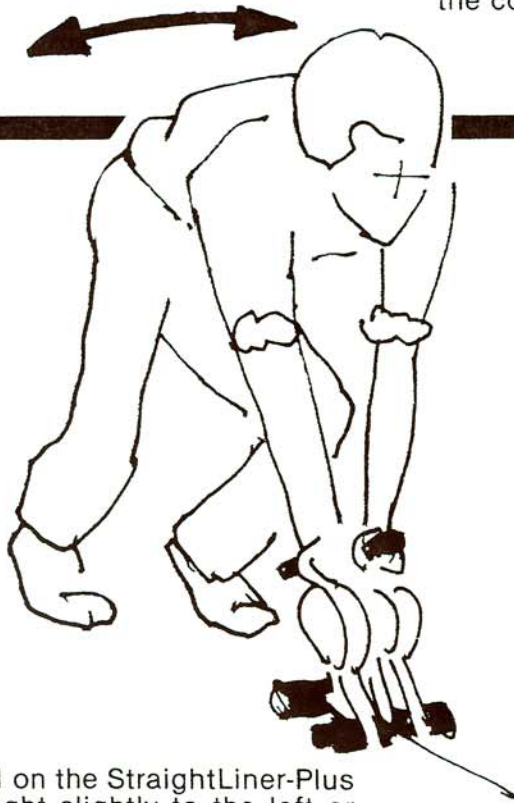

Lay lines pushing DOWN on the StraightLiner-Plus handles. Shifting body weight slightly to the left or right will compensate for straying of the unit caused by irregular court surfaces.



douglas[®]

Douglas Industries, Inc. PO Box 407 Eldridge, IA 52748